




09-11-2000

A

ATTORNEY'S DOCKET NO.  
062891.0362

PATENT APPLICATION

1



APPLICATION FOR U.S. PATENT UNDER 37 C.F.R. § 1.53(b)  
TRANSMITTAL FORM

Box Patent Application  
ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of:

Inventor or Application Identifier:

Kenneth M. Buckland

Entitled:

METHOD AND SYSTEM FOR PROCESSING TRAFFIC IN AN  
ACCESS NETWORK

Enclosed are:

- ☒ Specification ( 33 Total Pages)
- ☒ Drawing(s) ( 4 Total Sheet(s) of ☒ Formal ☐ Informal)
- ☒ Combined Declaration and Power of Attorney
  - ☒ Newly executed (original or copy)
  - ☐ Copy from a prior application  
(for continuation/divisional only)

☒ An Assignment of the invention to Cisco Technology, Inc. is attached.

A separate cover sheet in compliance with 37 C.F.R. § 3.28 and § 3.31 is included  
with an Assignment recordal fee of \$40.00 pursuant to 37 C.F.R. § 1.21(h).

☒ Certificate of Mailing

☒ Return Receipt Postcard

Applicant is:

- ☒ Large Entity
- ☐ Small Entity
  - ☐ Small Entity Statement enclosed
  - ☐ Small Entity Statement filed in prior application.  
Status still proper and desired.

ATTORNEY'S DOCKET NO.  
062891.0362

PATENT APPLICATION

2

The accompanying application is:

☒ Original.


☐ Continuation ☐ Divisional ☐ Continuation-In-Part (CIP)

of prior application No. \_\_\_\_\_ which is hereby incorporated by reference therein.

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee
					\$ 690.00
Total Claims:	40	-20 =	20	X \$18 =	\$ 360.00
Independent Claims	4	- 3 =	1	X \$78 =	\$ 78.00
TOTAL FILING FEE =					\$ 1,128.00

☒ Enclosed is a check in the amount of \$1,128.00 to satisfy filing fee requirements under 37 C.F.R. § 1.16. Please charge any additional fees or credit any overpayment to Deposit Account No. 02-0384 of BAKER BOTTS L.L.P. A duplicate copy of this sheet is enclosed.

Respectfully submitted,  
BAKER BOTTS L.L.P.  
Attorneys for Applicant

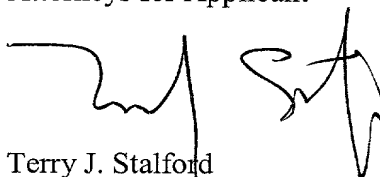

Terry J. Stalford  
Reg. No. 39,522  
September 7, 2000

Correspondence Address:  
Terry J. Stalford, Esq.  
Baker Botts L.L.P.  
2001 Ross Avenue  
Dallas, Texas 75201-2980

Tel. 214.953.6477  
Fax. 214.661.4477

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Kenneth M. Buckland  
Date Filed: September 7, 2000  
Title: METHOD AND SYSTEM FOR PROCESSING  
TRAFFIC IN AN ACCESS NETWORK



**BOX PATENT APPLICATION**

Honorable Assistant Commissioner

For Patents

Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Application Transmittal Form, Patent Application, executed Declaration and Power of Attorney, four (4) sheets of Formal Drawings, Assignment, Assignment Cover Sheet, firm checks in the amount of \$1,128.00 to cover the application filing fee, and \$40.00 assignment recordation fee, and this Certificate of Mailing are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on this 7th day of September, 2000 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

  
\_\_\_\_\_  
Willie Jiles

Express Mail Receipt  
No. EL501048595US  
Attorney's Docket:  
062891.0362

METHOD AND SYSTEM FOR PROCESSING TRAFFIC  
IN AN ACCESS NETWORK

TECHNICAL FIELD OF THE INVENTION

This invention relates generally to the field of access networks, and more particularly, to a method and system for processing traffic in an access network.

BACKGROUND OF THE INVENTION

Telecommunications networks include backbone networks having the main voice and data switches and access networks that carry traffic from the main voice and data switches out to business and residential subscribers. Historically, access networks have carried either voice traffic or data traffic converted into a voice format through modems and similar devices. With the advent of the Internet, the majority of data traffic is now carried in Internet Protocol (IP) packets.

Transporting data natively as IP packets using IP routing, however, requires extensive messaging and configuration overhead. High capacity IP routing can be efficiently implemented with hardware-based solutions in the backbone network due to the large economies of scale. Low capacity IP routing can also be efficiently implemented at customer premises using software-based routing solutions that exploit the low cost of microprocessors. IP routing, however, cannot be efficiently implemented in the intermediate speed access network where neither economies of scale nor low cost microprocessors can be exploited.

Recent developments in access networks have included the incorporation of asynchronous transport mode (ATM) functionality in access equipment. ATM switching equipment is relatively inexpensive compared with IP routers, which is a primary consideration in access networks due to the wide distribution of access equipment. The overhead of ATM cells (5 bytes for every 48 bytes of payload), however, makes ATM less attractive as a transport technology.

SUMMARY OF THE INVENTION

The present invention provides an improved method and system for processing traffic in an access network that substantially eliminates or reduces the problems and disadvantages of previous systems and methods. In particular, Internet Protocol (IP) traffic is routed only one way in the access network to minimize processing. In addition, incoming traffic may be converted to asynchronous transport mode (ATM) cells for efficient switching within the access network or within a single access unit and converted back to IP packets at the edge of the access network for efficient transport.

In accordance with one embodiment of the present invention, the method and system for processing traffic in an access network includes receiving a plurality of ingress traffic streams. Each ingress traffic stream includes a plurality of IP packets having an IP address. The ingress traffic streams are aggregated into a combined traffic stream without processing the IP addresses. That is, the packets are combined into a single stream regardless of final destination. The combined traffic stream is transmitted to a backbone network for routing based on the IP addresses. An egress traffic stream is received from the backbone network and includes a plurality of IP packets each having an IP address. A customer premise equipment (CPE) port is determined for each IP packet based on its IP address. The IP packets are routed to their respective CPE ports and transmitted to their destination CPEs.

More specifically, in accordance with a particular embodiment of the present invention, the incoming IP packets from both the ingress and egress traffic streams

are segmented into ATM adaption layer (AAL) cells for switching within the access network or within a single unit and reassembled back into IP packets at the edge of the IP network. In this embodiment, ingress IP packets  
5 are segmented at each CPE port using a fixed ATM address associated with the CPE port. Egress IP packets are segmented at a network port using an ATM address identified by looking up each IP address in static routing tables.

10 Technical advantages of the present invention include providing an improved access network and equipment. In particular, ingress packets from customer premise equipment (CPE) to the backbone network are aggregated into a single packet stream that is passed to  
15 the backbone network. Egress packets from the backbone network to the CPE are routed using static routing tables. Accordingly, the access network and equipment need provide only limited egress routing which greatly reduces the complexity and cost of the equipment and the  
20 network.

Another technical advantage of the present invention includes providing an improved method and system for routing traffic in the access network. In particular, incoming IP traffic is segmented into ATM cells and  
25 efficiently switched within the access network or within a single access unit. The traffic is converted back to IP traffic at the edge of the access network for transport efficiency across the backbone network. Accordingly, traffic processing efficiency is maximized  
30 in the access network while maintaining transport efficiency outside of the network.

Other technical advantages of the present invention will be readily apparent to one skilled in the art from the following figures, description, and claims.



BRIEF DESCRIPTION OF THE DRAWINGS

For more complete understanding of the present invention and its advantages, reference is now made to the following description taken in conjunction with the accompanying drawings, wherein like reference numerals  
5 represent like parts, in which:

FIGURE 1 is a block diagram illustrating a telecommunications system in accordance with one embodiment of the present invention;

10 FIGURE 2 is a block diagram illustrating details of the access device of FIGURE 1 in accordance with one embodiment of the present invention;

FIGURE 3 is a block diagram illustrating interconnection of the plurality of access devices in an access network in accordance with one embodiment of the  
15 present invention;

FIGURE 4 is a block diagram illustrating details of the access devices of FIGURE 3 in accordance with one embodiment of the present invention;

20 FIGURE 5 is a flow diagram illustrating a method for processing ingress traffic in an access network in accordance with one embodiment of the present invention;

FIGURE 6 is a flow diagram illustrating a method for processing egress traffic in an access network in  
25 accordance with one embodiment of the present invention;

FIGURE 7 is a flow diagram illustrating a method for processing ingress traffic in an access network using ATM switching in accordance with one embodiment of the present invention; and

30 FIGURE 8 is a flow diagram illustrating a method for processing egress traffic in an access network using ATM

switching in accordance with one embodiment with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 illustrates a telecommunications system 10 in accordance with one embodiment of the present invention. The telecommunications system 10 transmits voice, data, video, other suitable types of information and/or a combination of different types of information between source and destination points.

Referring to FIGURE 1, the telecommunications system 10 includes customer premise equipment (CPE) 12, an access network 14, and a backbone network 16. The access network 14 connects the CPE 12 to the backbone network 16 and communicates voice, data, video and/or other types of information between the CPE 12 and the network 16. In the illustrated embodiment, the CPEs 12, access network 14, and backbone network 16 communicate traffic in Internet Protocol (IP) packets. It will be understood that traffic may be transported in other suitable packets in and between the customer premise equipment 12, access network 14 and backbone network 16 without departing from the scope of the present invention.

The CPEs 12 comprise business and residential equipment including standard telephones, modems, computers, dataphones, Web appliances, and/or other devices capable of generating traffic for transmission in the telecommunications system 10. The CPEs 12 may also include a network interconnecting the traffic generation devices, local switches, and a small IP hub or router. Each CPE 12 is connected to the access network 14 through a communication link 20. As used herein, each means every one of at least a subset of the identified items. The communication link is a T1 line, conventional twisted pair cable, fiber optic cable, or other suitable type of

wireline and/or wireless link. For the IP traffic embodiment, the T1 interface includes 24 DS-0 channels, each representing a 64 kb/s stream, with a group concatenated to form a single hyper-channel for IP traffic. Some of the remainder DS-0 channels may be dedicated to voice traffic.

The access networks 14 receive, process and transport ingress traffic from the CPEs 12 to the backbone network 16 and egress traffic from the backbone network 16 to the CPEs 12. Each access network 14 is connected to the backbone network 16 through a communication link 22. For the IP traffic embodiment, the communication link 22 is an unchannelized DS-3, OC-3 packet over SONET (POS), or other suitable high capacity interface.

Each access network 14 includes one or more access devices 20. As described in more detail below, the access device 20 performs one-way access routing of traffic by aggregating ingress traffic without regard to its destination IP address into one or more predefined traffic streams for transport to the backbone network 16. Egress traffic is routed to the various CPEs 12 using static routing information that need only be modified when, for example, specific customer locations reached through the CPE 12 are added or removed. Accordingly, the access device 20 need not make routing decisions for ingress traffic and need only route egress traffic to a relatively small number of essentially static customers.

As also described in more detail below, the IP packets may be converted into asynchronous transport mode (ATM) adaption layer (AAL) cells in the access network 14 for efficient switching within the access network 14 and

converted back to IP packets at the edge of the access network 14 for efficient transport to and processing in CPEs 12 and the backbone network 16.

The backbone network 16 includes portions of the Internet, one or more intranets, other wide or local area networks and/or other suitable switched or routed networks. In a particular embodiment, the backbone network 16 includes backbone routers 24 at its borders for communicating with the access devices 20. In this embodiment, the backbone routers may be Cisco 12000 routers. It will be understood that different types of backbone routers 24 as well as different types of devices capable of directing, switching or otherwise directing IP traffic may be used in and at the border of the backbone network 16.

FIGURE 2 illustrates details of the access device 20 in accordance with one embodiment of the present invention. In this embodiment, the access device 20 is implemented in a card shelf configuration with functionality of the device distributed between discrete cards connected over a backplane having one or more inter card transmission links. It will be understood that other suitable types of access devices and/or nodes may be used in connection with the present invention.

Referring to FIGURE 2, the access device 20 includes line cards 40, a switch core 44, and a backplane 46. The line cards 40 and switch cards of the switch core 44 each include hardware and logic operable to perform switch and other functionality of the cards. The logic may be embedded in hardware such as in an application specific integrated circuit (ASIC) or a field programmable gate array (FPGA) or comprise software stored in a computer-

readable medium such as random access memory (RAM), read only memory (ROM) and/or other suitable memory. The line cards 40 are each a discrete card configured to plug into the backplane 46. The switch core 44 comprises one or more discrete switch cards also configured to plug into the backplane 46.

The line cards 40 include CPE interface cards 48 and one or more network interface cards 50. The CPE interface cards 48 each communicate with one or more CPEs 12 over the communications link 18. The network interface card 50 communicates with the backbone network 16 over the communications link 22. It will be understood that other suitable types of interface line cards may be used in the access device 14.

The CPE interface and network cards 48 and 50 include one or more external interfaces, or ports, one or more internal interfaces and a traffic processor. Ports receive traffic from the external line and/or transmit traffic received by the internal interface from the switch core 44. The internal interfaces transmit traffic received by the ports from the external links and receive traffic from the switch core 44. The internal interface communicates with the switch core 44 over the backplane 46. The traffic processor is preferably local to the line card 40 and includes hardware and software for processing IP traffic, telephony voice (DS-0), synchronous transmission signal (STS) traffic, integrated services digital network (ISDN) traffic, synchronous optical network (SONET) traffic, synchronous digital hierarchy (SDH), asynchronous transfer mode (ATM) traffic, and/or other suitable traffic. The ports, internal interfaces and traffic processor of the cards 48

and 50 may be logically segmented into receive interfaces for processing traffic incoming to the access device 20 and transmit interfaces for processing traffic outgoing from the access device 20.

5 In one embodiment, the CPE interface card 48 is a low speed line card that sends and receives IP packets to and from the CPE 12 using T1 rate interfaces. In this embodiment, a receive interface 60 delineates high-level data link controller (HDLC) packets in the incoming bit  
10 stream and routes IP packets in the stream through the switch core 44 to the network interface card 50 for transmission to the backbone network 16. A transmit interface 62 receives routed IP packets from the network interface card 50 after they are switched by the switch  
15 core 44. The packets are buffered in buffer 64 one after another and transmitted in a first-in, first-out (FIFO) order after wrapping them in the HDLC packet delineation format.

The network interface card 50 is a high speed line  
20 card that sends and receives IP packets to and from the backbone network 16 using DS-3 or OC-3 rate interfaces. A receive interface 70 delineates HDLC packets in the incoming traffic stream and recovers an IP destination address in each IP packet. The receive interface 70 uses  
25 a routing table 74 to determine the CPE interface port for each IP packet based on its IP destination address. The receive interface 70 then routes the IP packet to that port for transmission. A transmit interface 72 receives IP packets from the CPE interface ports and  
30 buffers the IP packets one after the other in buffer 76. The transmit interface 72 then transmits the IP packets

in a first-in, first-out (FIFO) order after wrapping the IP packets in the HDLC packet delineation format.

In operation, traffic is routed one-way through the access device 20. IP packets are passed from the backbone network 16 to the CPE 12 and from the CPE 12 to the backbone network 16, but are not routed directly from one piece of CPE 12 through the access device 20 to another piece of CPE 12. Thus, for an IP packet to get from one piece of CPE 12 to another, the IP packet hair-pins through the backbone router 24 of the backbone network 16. The one-way routing restriction simplifies routing operations performed by the access device 20. Specifically, in the ingress direction from the CPE 12 to the backbone network 16, no routing is performed or required. This is because all of the ingress packets are aggregated into a single large packet stream or other predefined streams that are passed to the backbone network 16. No routing decisions need be made.

In the egress direction from the backbone network 16 to the CPE 12, routing decisions determine how the IP packets from the network 16 should be disbursed to the various CPE 12. This routing is straightforward because the CPE 12 constitutes a relatively static set of IP destinations that are stored in the static routing table 74. The routing table 74 need be modified only when specific customer locations reached through the CPE 12 are added or removed. As a result, egress packets are routed only to a relatively small number of basically static customers that rarely change after set-up, which simplifies the operation of the access device 14.

In a particular embodiment of the present invention, access routing is performed by the access devices 20



using ATM switching. In this embodiment, the transmit and receive interfaces 60, 62, 70, and 72 of the CPE and network interface cards 48 and 50 each include a segment and reassembly (SAR) element 80. The SARs 80 segment incoming IP packets into ATM adaption layer (AAL) cells using ATM adaptation layer 5 (AAL-5) or other suitable standard or modified standard. The AAL cells are switched by the switch core 44 and thereafter reassembled back into IP packets for transmission on an outgoing interface.

In the ATM switching embodiment, the receive interface 60 of the CPE interface 48 delineates HDLC packets in the incoming bit stream, drops defective packets, processes ICMP messages, segments the IP packet into AAL cells using a single fixed VPI/VCI value and transfers the AAL cells to an ATM switch 82. The transmit interface 62 receives AAL cells from the ATM switch 82, buffers the AAL cells until their payload type identifier (PTI) value indicates that a complete IP packet is stored in the buffer 64, verifies that the IP packet is error free and drops the IP packet if it has errors. The transmit interface 62 reads complete IP packets from the buffer 64, wraps the IP packets in the HDLC packet delineation format and transmits the IP packets over physical interface to the CPE 12.

In the network interface card 50, the receive interface 70 delineates HDLC packets in the incoming bit stream, recovers the IP destination address and uses the address in connection with the routing table 74 to determine the CPE interface port and VPI/VCI value for the IP packet, drops defective packets, processes ICMP messages, segments the IP packets into AAL cells and

transfers the AAL cells to the ATM switch 82 in the switch core 44. The transmit interface 72 receives AAL cells from the ATM switch 82, buffers the AAL cells according to their CPE interface port number and VPI/VCI values until their PTI value indicates that a complete packet is stored in the buffer 76, verifies that the IP packet is error free and drops the IP packet if it has errors. The transmit interface 72 reads complete IP packets from the buffer 76, one at a time, wraps the IP packets in the HDLC packet delineation format and transmits the packets over the physical interface.

In operation, in the direction from the CPE 12 to the backbone network 16, all of the IP packets from each CPE interface 48 are segmented into AAL cells with the same virtual private interface/virtual connection interface (VPI/VCI) value. Before transmission to the backbone network 16, the AAL cells are reassembled into IP packets, with the AAL cells from each CPE interface 48 kept separate in the buffer 76 using the different incoming port numbers and VPI/VCI values. This prevents corruption of the IP packets and allows a single end-to-end outgoing packet stream to be constructed out of the many incoming streams.

In the direction from the backbone network 16 to the CPE 12, the destination address of all of the IP packets from the backbone network 16 are inspected. Using the routing table 74, the destination address of each IP packet is used to determine a unique VPI/VCI value associated with the appropriate outgoing port for the IP packet. The IP packet is then segmented into the AAL cell stream that employs the prescribed VPI/VCI value. The resultant ATM cells are switched and then reassembled

into IP packets before transmission to the destination CPE 12.

Using the ATM-based switching, the CPE interface card 48 need not inspect a routing table. Further, the CPE interface card 48 segments incoming traffic into AAL cells with a single fixed VPI/VCI value and in the outgoing direction reassembles AAL cells with only a single VPI/VCI value. This simplifies the SAR process on the CPE interface card 48, which allows for cost reductions during implementation. Although the requirements placed on the backbone router 24 in the backbone network 16 are increased, the greater cost and complexity of the backbone router 24 interface is relatively small and effectively shared between a number of the CPEs 12.

FIGURE 3 illustrates an access network 100 including an intra network ATM link in accordance with one embodiment of the present invention. In this embodiment, the ATM link extends between access devices. The ATM interfaces are not visible outside the access network 100.

Referring to FIGURE 3, the access network 100 includes the first access device 110 and a second access device 112 connected in series between the CPE 102 and the backbone router 104, which each include IP interfaces. Ingress IP traffic from the CPE 102 is received, processed and converted to AAL cells for switching within the access device 110 as previously described in connection with the access device 20. The AAL cells are aggregated into a combined stream that is transferred to the second access device 112 over ATM link 114. The second access device 112 receives the combined

stream of AAL cells and additional IP traffic from CPEs 115. The additional IP traffic is received, processed and converted to AAL cells for switching within the second access device 112 as previously described in connection with the access device 20. At the network port on the access device 112, the ATM traffic from the ATM link 114 and from the CPEs 115 is reassembled back into IP packets and aggregated into a single stream for transmission to the backbone router 104. In this way, traffic is efficiently switched as ATM traffic through a plurality of devices in the access network 100.

FIGURE 4 illustrates details of the access devices 110 and 112 of FIGURE 3 in accordance with one embodiment of the present invention. In this embodiment, the first and second access devices 110 and 112 include CPE interface cards 120 that are constructed and operate as described in connection with the CPE interface cards 48. ATM interface cards 126 and 128 are provided to transmit traffic between the access devices 110 and 112 across the ATM link 114.

In the ingress direction, the CPE interface cards 120 convert IP traffic to AAL cells and transmit the AAL cells to an ATM switch 122 in the switch core 124. In the first access device 110 distal from the network periphery of the access network 100, the ATM switch 122 switches the AAL cells to an ATM interface card 126 which transmits the cells over the ATM link 114 to an ATM interface card 128 in the second access device 112 at the network periphery of the access network 100. From the ATM interface card 128, the AAL cells are transferred to the network interface card 130 through the ATM switch 122. At the network interface card 130, the AAL cells

are reassembled back into IP packets and aggregated with locally received and other CPE traffic for transmission to the backbone router 104.

In the egress direction, the second access device 5 112 proximate to the network periphery of the access network 100 receives IP traffic from the backbone router 104 and converts the IP traffic to AAL cells using a unique VPI/VCI value for each CPE port in the second access device 112 and the downstream first access device 10 110. AAL cells destined for locally connected CPEs 115 are switched to the local CPE interface cards 120 while AAL cells destined for downstream connected CPEs 102 are switched to the ATM interface card 128 for transport over the ATM link 114 to the ATM interface card 126 of the 15 first access device 110. From the ATM interface card 126, the AAL cells are switched to appropriate CPE interface cards 120 for transport to the locally connected CPEs 102. At the CPE interface cards 120, the AAL cells are reassembled back into IP packets and 20 transmitted to the corresponding CPEs 115 and 102. In this way, ATM links can be readily established between access devices to maximize efficiency within the access network 100.

FIGURE 5 is a flow diagram illustrating a method for 25 processing ingress traffic in an access network in accordance with one embodiment of the present invention. In this embodiment, traffic is received, processed and transmitted in IP packets by access device 20. It will be understood that other or different types of suitable 30 ingress datagrams may be processed by the access network without departing from the scope of the present invention.

Referring to FIGURE 5, the method begins at step 160 in which an ingress traffic stream is received from each of a plurality of CPEs 12. The ingress traffic streams are received by the CPE interface cards 48 and include a plurality of IP packets having IP addresses. At step 162, the IP packets are delineated by the receive interface 60.

Proceeding to step 164, the IP packets are routed to a network interface port of the network interface card 50. In one embodiment, the IP packets are routed between the CPE interface card 58 and the network interface card 80 by the switch core 44 over the backplane 46. At the network interface card 50, the IP packets are aggregated into a combined packet stream by the transmit interface 72.

At step 168, the IP packets of the combined packet stream are buffered in the buffer 76. Next, at step 170, the IP packets are encapsulated as they are removed from the buffer 76 for transmission to and within the backbone network 16. At step 172, the IP packets are transmitted to the backbone network 16 for routing to a destination. Step 172 leads to the end of the process by which IP packets are processed in the ingress direction without need for routing decisions.

FIGURE 6 is a flow diagram illustrating a method for processing egress traffic in an access network in accordance with one embodiment of the present invention. In this embodiment, traffic is received, processed and transmitted in IP packets by the access device 20. It will be understood that other different types of suitable egress datagrams may be processed by the access network

without departing from the scope of the present invention.

Referring to FIGURE 6, the method begins at step 180 in which an egress traffic stream is received by the network interface card 50 of the access device 20 from the backbone network 16. At step 182, HDLC packets in the egress traffic stream are delineated by the receive interface 70. At step 184, the IP destination address for each IP packet is recovered from the packet.

Proceeding to step 186, the CPE interface port for each IP packet is determined based on the IP destination address using the routing table 74. At step 188, each IP packet is routed to the identified CPE interface port by the switch core 44 over the backplane 46.

At step 190, the IP packets are buffered at each CPE interface port by the buffer 64. At step 192, the packets are encapsulated as they are removed from the buffer 64 by wrapping them in the HDLC packet delineation format. The IP packets are then transmitted from each port to the corresponding CPE at step 194. Step 194 leads to the end of the process by which egress traffic from the backbone network 16 is routed using static routing information.

FIGURE 7 is a flow diagram illustrating a method for processing ingress traffic in an access network using ATM switching in accordance with one embodiment of the present invention. In this embodiment, traffic is received as IP packets and segmented into AAL cells for routing in the access network by access device 20. It will be understood that traffic may be received in other suitable datagrams and segmented into and reassembled

from other types of cells or converted to other formats for access routing.

Referring to FIGURE 7, the method begins at step 200 in which ingress traffic is received at the CPE interface  
5 card 48 of the access device 20 from the CPEs 12. At step 202, HDLC packets in the traffic streams are delineated. At step 204, the packets are validated. Defective packets are dropped at step 206.

Proceeding to step 208, the IP packets are segmented  
10 into AAL-5 or other suitable ATM cells using a fixed ATM address for each CPE interface port. In one embodiment, the fixed ATM address is a fixed VPI/VCI. Other suitable ATM values uniquely identifying the CPE ports may be used.

At step 210, the AAL cells are transferred to the  
15 ATM switch 82. At step 212, the AAL cells are switched to a common interface port on the network interface card 50 for transmission to the backbone network 16. At step 214, the AAL cells are buffered at the network interface  
20 port based on the CPE port and ATM address. Thus, packets from each CPE interface are kept separate using their different incoming port numbers and VPI/VCI values. This prevents corruption of the packets and facilitates construction of a single end-to-end outgoing packet  
25 stream out of the incoming streams.

Next, at step 216, after the AAL cells forming an IP  
packet are received at the network interface port, the IP packet is reassembled from the complete set of AAL cells. In one embodiment, the AAL cells are buffered until their  
30 PTI value indicates a complete packet is stored in the buffer. The IP packet is validated at step 218. Defective packets are dropped at step 220.



At step 222, the IP packets are encapsulated in the HDLC packet delineation format. The packets are transmitted over the physical interface to the backbone network 16 at step 224. Step 224 leads to the end of the process by which ingress IP packets are efficiently access routed using ATM switching.

FIGURE 8 is a flow diagram illustrating a method for routing egress traffic in an access network using ATM switching in accordance of the present invention. In this embodiment, traffic is received in IP packets and segmented into AAL cells for routing within the access network by access device 20. It will be understood that traffic may be received in other suitable types of datagrams and segmented into and reassembled from other types of cells or converted to other formats for access routing.

Referring to FIGURE 8, the method begins at step 230 in which an egress traffic stream is received from the backbone network 16 by the receive interface 70 of the network interface card 50. At step 232, HDLC packets are delineated from the egress traffic stream. The destination address for each packet is recovered at step 234 by the receive interface 70.

Proceeding to step 236, the CPE interface port and ATM address is determined for each IP packet based on the destination address. In one embodiment, the CPE interface port and ATM address are determined using the routing table 74. In this embodiment, ATM address is an assigned VPI/VCI or other suitable unique identifier.

Next, at step 238, each IP packet is segmented into AAL-5 or other suitable ATM cells using the ATM address and CPE port. The AAL cells are transferred to the ATM

switch 82 at step 240. At step 242, the AAL cells are each switched to a CPE interface port identified by the ATM address and CPE port.

Proceeding to step 244, the AAL cells are buffered  
5 at each CPE interface port in the buffer 64. Each CPE interface port will have only one string of AAL cells with a single VPI/VCI value. At step 246, after all AAL cells forming an IP packet are received at the CPE interface port, the IP packet is reassembled from the  
10 complete set of AAL cells. In one embodiment, the AAL cells are buffered until their PTI value indicates that a complete packet is stored in the buffer 64. The IP packet is then validated at step 248. Defective packets are dropped at step 250.

15 At step 252, the IP packets are encapsulated by wrapping them in the HDLC packet delineation format. At step 254 the IP packets are transmitted over the physical interface to the corresponding CPE 12. In this way, traffic is efficiently routed and switched within the  
20 access network 14 using static routing information.

Although the present invention has been described with several embodiments, various changes and modifications may be suggested to one skilled in the art. It is intended that the present invention encompass such  
25 changes and modifications as fall within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A method for processing traffic in an access network, comprising:

receiving a plurality of ingress traffic streams,  
5 each ingress traffic stream including a plurality of packets having a destination address;

aggregating the ingress traffic streams into a combined traffic stream without regard to the destination addresses; and

10 transmitting the combined traffic stream to a backbone network for routing based on the destination addresses.

2. The method of Claim 1, wherein the packets are  
15 Internet Protocol (IP) packets and each include an IP address.

3. The method of Claim 1, further comprising:  
receiving each of the ingress traffic streams from  
20 customer premise equipment (CPE); and  
transmitting the combined traffic stream to a backbone router in the backbone network.

4. The method of Claim 2, further comprising:  
25 validating IP packets in the ingress traffic streams;

and aggregating all valid packets into the combined traffic stream.

5. The method of Claim 2, further comprising:  
routing IP packets of the ingress traffic streams to  
30 a network interface port of an access device; and

aggregating the IP packets into the combined traffic stream at the network interface port.

6. The method of Claim 2, further comprising:

5 receiving the ingress traffic streams at a plurality of customer premise equipment (CPE) ports;

segmenting at the CPE ports the IP packets in the ingress traffic streams into asynchronous transport mode (ATM) adaption layer (AAL) cells;

10 switching the AAL cells to a network interface port;

reassembling the IP packets from the AAL cells at the network interface port; and

aggregating the IP packets into the combined traffic stream.

15 7. The method of Claim 6, further comprising:

segmenting IP packets at each CPE port into sets of AAL cells having a fixed ATM address associated with the CPE port;

20 buffering the AAL cells at the network interface port based on their ATM addresses; and

reassembling the IP packets from completed sets of AAL cells.

25 8. The method of Claim 7, wherein the ATM address comprises a virtual private interface/virtual connection interface (VPI/VCI) address.

9. The method of Claim 6, wherein the IP packets are segmented into ATM adaption layer five (AAL-5) cells.

10. The method of Claim 2, further comprising:

5 receiving an egress traffic stream from the backbone network, the egress traffic stream including a plurality of IP packets each having an IP address;

determining a customer premise equipment (CPE) port for each IP packet based on its IP address;

10 routing the IP packets to their respective CPE ports; and

transmitting the IP packets from the CPE ports to their destination CPEs.

15 11. The method of Claim 10, further comprising determining the CPE ports for the IP packets using a static routing table.

12. The method of Claim 10, further comprising:

20 determining an asynchronous transport mode (ATM) address for each IP packet based on its IP address;

segmenting each IP packet into a set of ATM adaption layer (AAL) cells having the ATM address for the IP packet;

25 switching the AAL cells to their respective CPE ports based on the ATM addresses; and

reassembling the IP packets from the AAL cells at each CPE port for delivery.

30 13. The method of Claim 12, further comprising:

buffering the AAL cells at each CPE port based on their ATM addresses; and

reassembling the IP packets from completed sets of  
AAL cells.

14. The method of Claim 12, wherein the ATM address  
5 comprises a virtual private interface/virtual connection  
interface (VPI/VCI) address.

15. The method of Claim 12, wherein the IP packets  
are segmented into ATM adaption layer five (AAL-5) cells.

16. A system for processing traffic in an access network, comprising:

means for aggregating a plurality of ingress traffic streams from customer premise equipment (CPE) into a combined traffic stream for transmission to a backbone network; and

means for routing egress traffic received from the backbone network to CPEs using a static routing table.

17. The system of Claim 16, wherein the ingress and egress traffic stream comprise the plurality of Internet Protocol (IP) packets.

18. The system of Claim 17, further comprising:

means for segmenting incoming IP packets into asynchronous transport mode (ATM) adaption layer (AAL) cells;

means for switching the AAL cells within the access network; and

means for reassembling the AAL cells into outgoing IP packets.

19. The system of Claim 18, wherein the IP packets are segmented into ATM adaption layer five (AAL-5) cells.

20. A method for routing traffic in an access network, comprising:

receiving ingress Internet Protocol (IP) packets from customer premise equipment (CPE);

5 receiving egress IP packets from a backbone network for delivery to CPEs;

segmenting the ingress IP packets at a CPE interface of an access network into asynchronous transport mode (ATM) adaption layer (AAL) cells;

10 segmenting the egress IP packets at a network interface into AAL cells; and

switching the AAL cells across the access network.

15 21. The method of Claim 20, wherein the IP packets are segmented into ATM adaption layer five (AAL-5) cells.

22. The method of Claim 20, further comprising reassembling the AAL cells into IP packets at a periphery of the access network.

20

23. The method of Claim 22, further comprising delineating the IP packets.

25 24. The method of Claim 22, further comprising validating the IP packets.

25. The method of Claim 22, further comprising dropping defective IP packets.



26. A system for processing traffic in an access network, comprising:

logic stored in a computer processable medium; and

the logic operable to receive a plurality of ingress  
5 traffic streams, each ingress traffic stream including a  
plurality of Internet Protocol (IP) packets having an IP  
address, aggregate the ingress traffic streams into a  
combined traffic stream without regard to the IP  
addresses and transmit the combined traffic stream to a  
10 backbone network for routing based on the IP addresses.

27. The system of Claim 26, the logic further  
operable to receive each of the ingress traffic streams  
from customer premise equipment (CPE).

28. The system of Claim 26, the logic further  
operable to transmit the combined traffic stream to a  
backbone router in the backbone network.

29. The system of Claim 26, the logic further  
operable to validate IP packets in the ingress traffic  
stream and to aggregate all valid packets into the  
combined traffic stream.

30. The system of Claim 26, the logic further  
operable to route IP packets in the ingress traffic  
streams to a network interface port of an access device  
and to aggregate the IP packets into the combined traffic  
stream at the network interface port.

31. The system of Claim 26, the logic further operable to receive the ingress traffic streams at a plurality of customer premise equipment (CPE) ports, segment at the CPE ports the IP packets in the ingress traffic streams into asynchronous transport mode (ATM) adaption layer (AAL) cells, switch the AAL cells to a network interface port, reassemble the IP packets from the AAL cells at the network interface port and aggregate the IP packets into the combined traffic stream.

32. The system of Claim 31, wherein the IP packets are segmented into ATM adaption layer five (AAL-5) cells.

33. The system of Claim 31, the logic further operable to segment IP packets at each CPE port into sets of AAL cells having a fixed ATM address associated with the CPE port, buffer the AAL cells at the network interface port based on their ATM addresses, and reassemble the IP packets from completed sets of AAL cells.

34. The system of Claim 33, wherein the ATM address comprises a virtual private interface/virtual connection interface (VPI/VCI) address.

35. The system of Claim 26, the logic further operable to receive an egress traffic stream from the backbone network, the egress traffic stream including a plurality of IP packets each having an IP address, determine a customer premise equipment (CPE) port for each IP packet based on its IP address, route the IP

packets to their respective CPE ports and transmit the IP packets from the CPE ports to their destination CPEs.

36. The system of Claim 35, the logic further  
5 operable to determine the CPE ports for the IP packets using a static routing table.

37. The system of Claim 35, the logic further  
operable to determine an asynchronous transport mode  
10 (ATM) address for each packet based on its IP address, segment each IP packet into a set of ATM adaption layer (AAL) cells having the ATM address for the IP packet, switch the AAL cells to their respective CPE ports based on the ATM addresses and reassemble the IP packets from  
15 the AAL cells at each CPE port for delivery based on their IP addresses.

38. The system of Claim 37 the logic further  
operable to buffer the AAL cells at each CPE port based  
20 on their ATM addresses and reassemble the IP packets from completed sets of AAL cells.



39. The system of Claim 37, wherein the ATM  
addresses comprise a virtual private interface/virtual  
25 connection interface (VPI/VPI) address.




40. The system of Claim 37, wherein the IP packets are segmented into ATM adaption layer five (AAL-5) cells.



METHOD AND SYSTEM FOR PROCESSING TRAFFIC  
IN AN ACCESS NETWORK


ABSTRACT OF THE DISCLOSURE

5           A method and system for processing traffic in an  
access network includes receiving a plurality of ingress  
traffic streams from customer premise equipment (CPE).  
Each ingress traffic stream includes a plurality of  
Internet Protocol (IP) packets having an IP address. The  
10 ingress traffic streams are aggregated into a combined  
traffic stream without regard to the IP addresses. The  
combined traffic stream is transmitted to a backbone  
network for routing based on the IP addresses. An egress  
traffic stream is received from the backbone network and  
15 includes a plurality of IP packets each having an IP  
address. A CPE port is determined for each IP packet  
based on its IP address. The IP packets are routed to  
their respective CPE ports and transmitted to their  
destination CPEs.

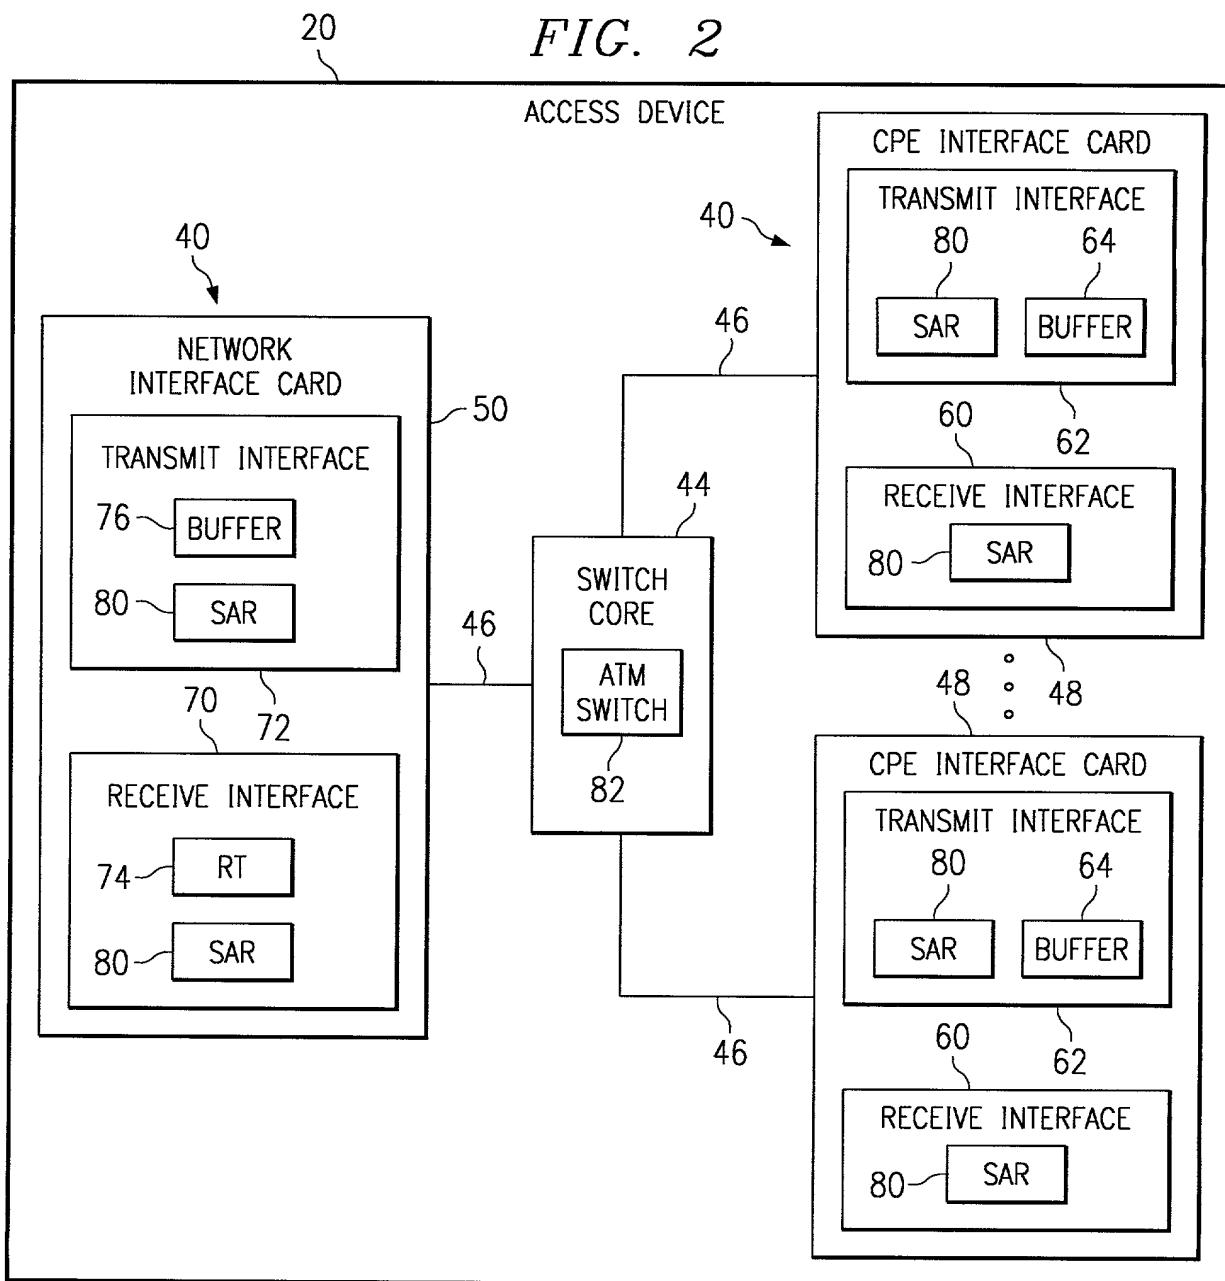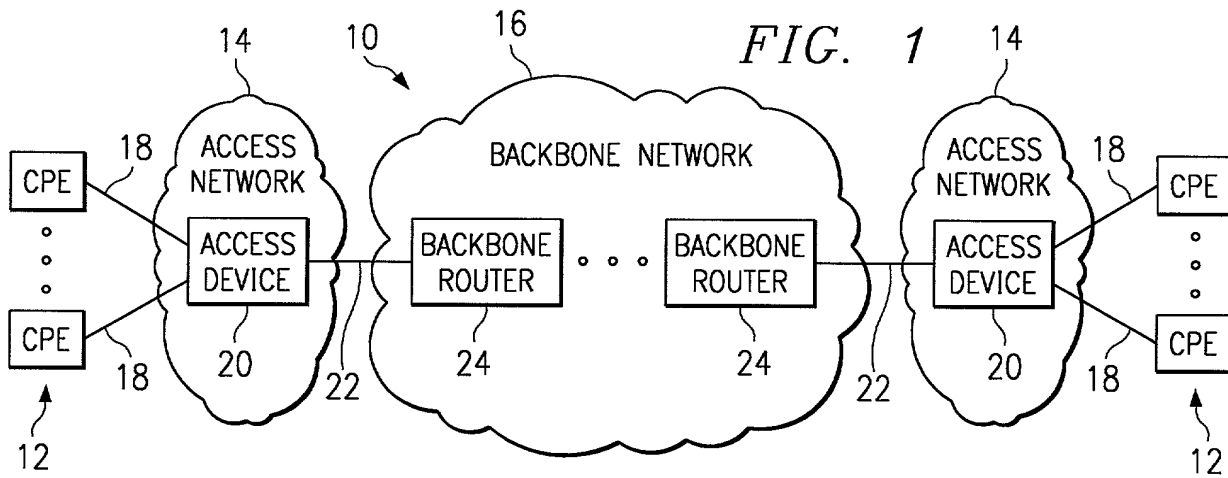

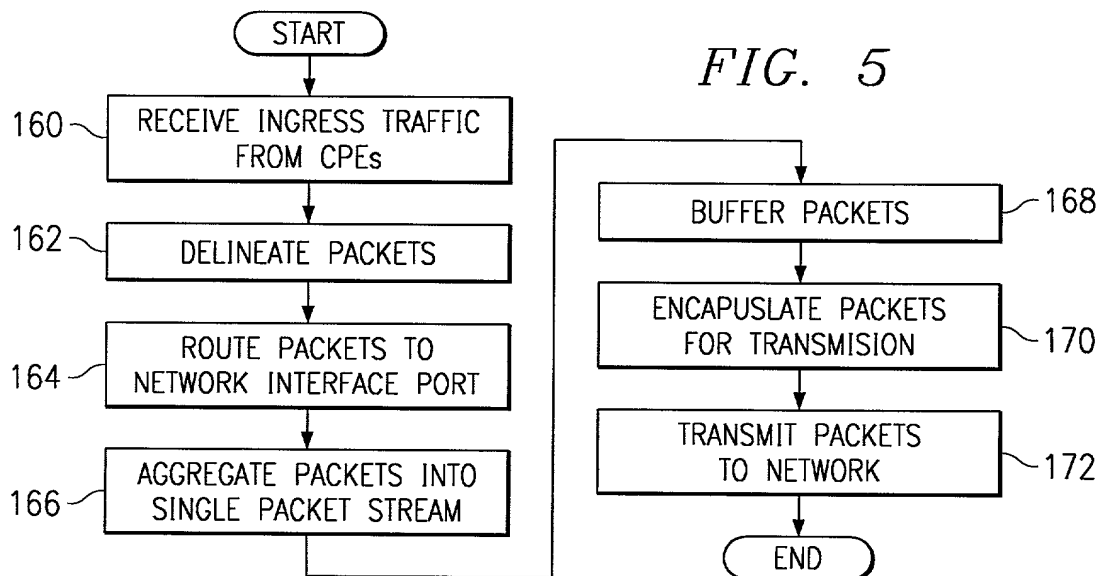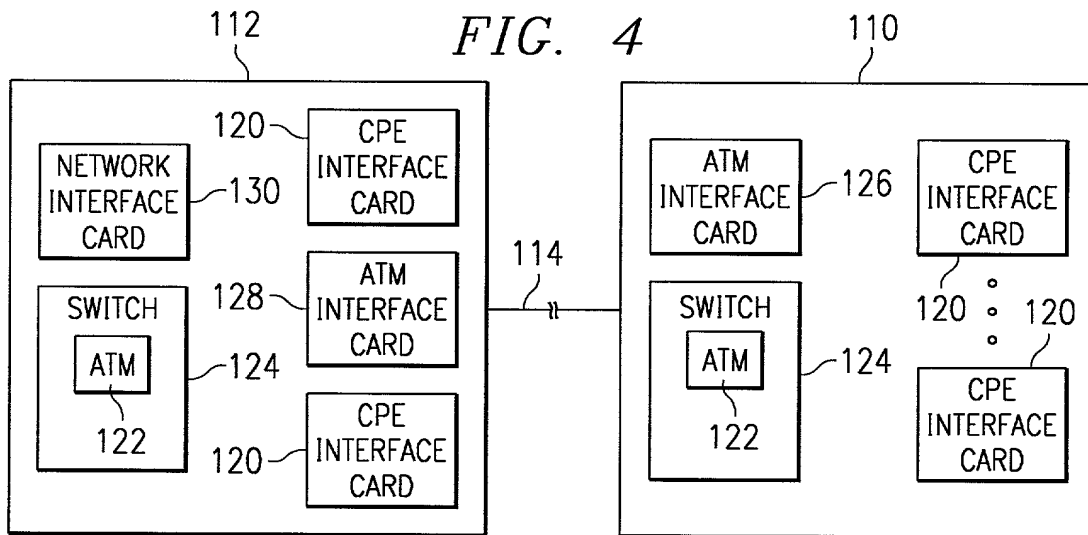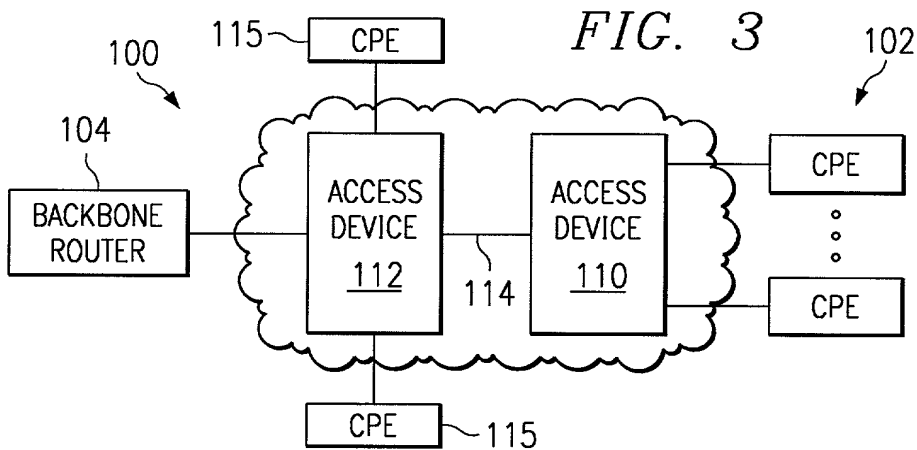

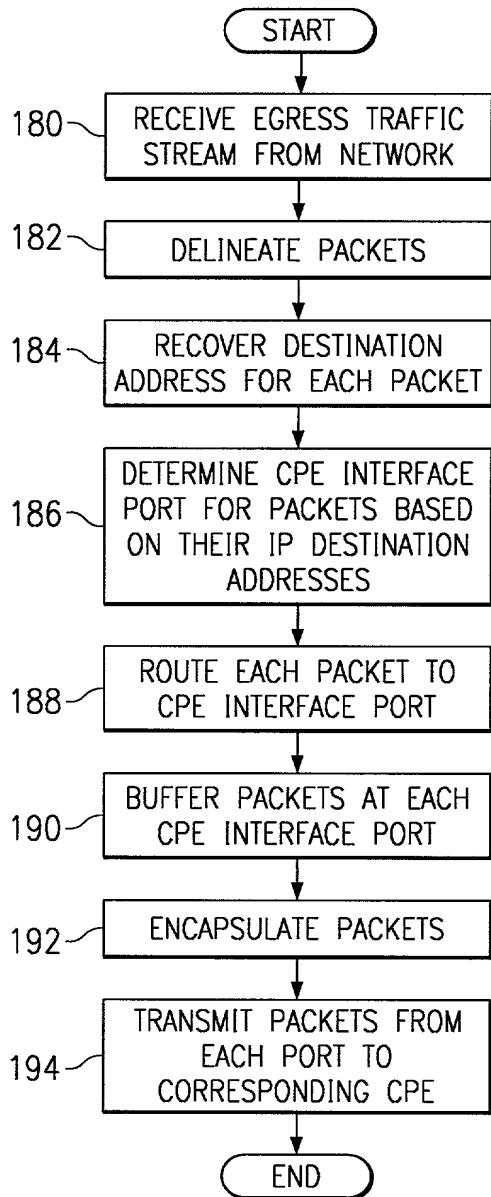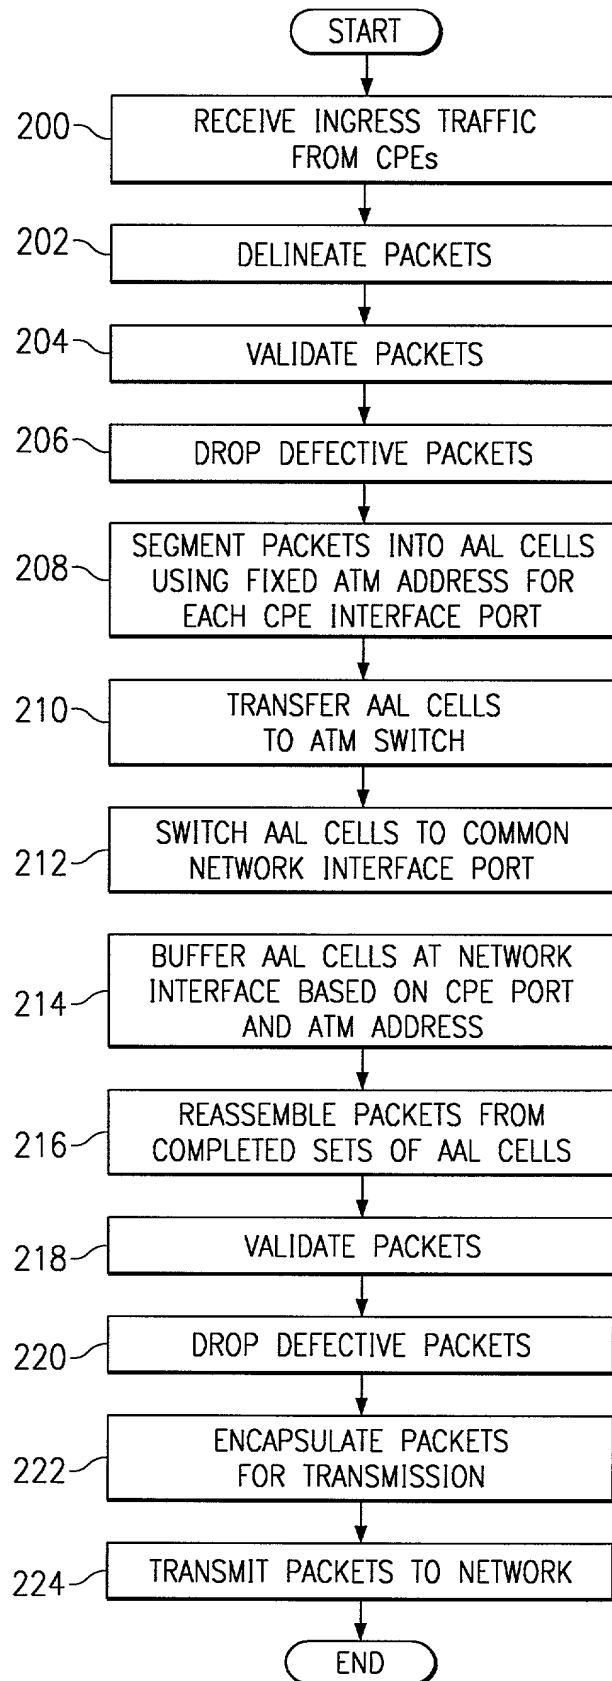*FIG. 6**FIG. 7*

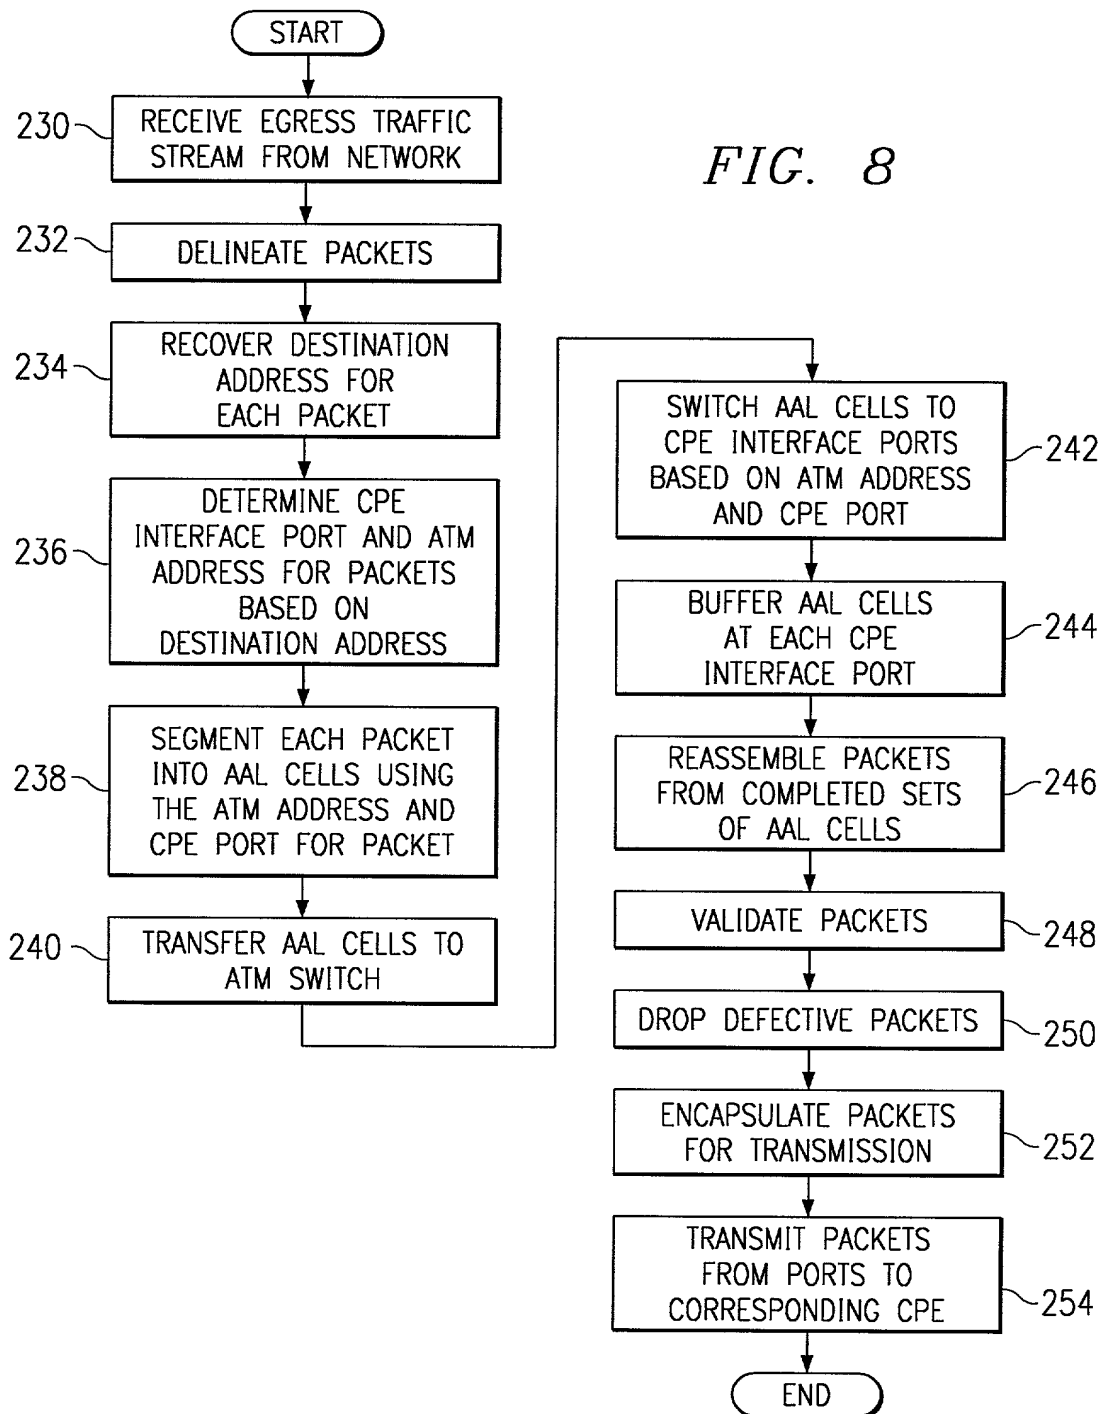



DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention or design entitled METHOD AND SYSTEM FOR PROCESSING TRAFFIC IN AN ACCESS NETWORK, the specification of which

  X   is attached hereto; or

           was filed on            as Application Serial No.            and  
was amended on            (if applicable);

that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed (Yes) (No)</u>
---------------	----------------	-----------------------	--

-----NONE-----

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Application</u> <u>Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
--	-------------------	---------------

-----NONE-----

I hereby appoint:

Jerry W. Mills	Reg. No. 23,005
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Ann C. Livingston	Reg. No. 32,479
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Kevin J. Meek	Reg. No. 33,738
T. Murray Smith	Reg. No. 30,222
Barton E. Showalter	Reg. No. 38,302
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227
Terry J. Stalford	Reg. No. 39,522
Christopher W. Kennerly	Reg. No. 40,675
Harold E. Meier	Reg. No. 22,428
Douglas M. Kubehl	Reg. No. 41,915
Samir A. Bhavsar	Reg. No. 41,617
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946
Roger J. Fulghum	Reg. No. 39,678
Rodger L. Tate	Reg. No. 27,399
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
James Remenick	Reg. No. 36,902
Jay B. Johnson	Reg. No. 38,193
Robert W. Holland	Reg. No. 40,020
Floyd B. Chapman	Reg. No. 40,555
Robert A. King	Reg. No. 42,738
James L. Baudino	Reg. No. 43,486
Tara D. Knapp	Reg. No. 43,723
William R. Borchers	Reg. No. 44,549
Robin A. Brooks	Reg. No. 44,563
Brian W. Oaks	Reg. No. 44,981
Luke K. Pedersen	Reg. No. 45,003
Matthew B. Talpis	Reg. No. 45,152
David M. Doyle	Reg. No. 43,596
Keiko Ichiye	Reg. No. 45,460
Jeffery D. Baxter	Reg. No. 45,560
Thomas A. Beaton	Reg. No. P46,543
Kurt M. Pankratz	Reg. No. P46,977
Brian E. Szymczak	Reg. No. P47,120

Patent Agents:

Brian A. Dietzel	Reg. No. 44,656
Kevin R. Imes	Reg. No. 44,795

all of the firm of Baker Botts L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith and to file and prosecute any international patent applications filed thereon before any international authorities under the Patent Cooperation Treaty.

Send Correspondence To:

Baker Botts L.L.P.  
2001 Ross Avenue  
Dallas, Texas 75201-2980

Direct Telephone Calls To:

Terry J. Stalford  
at 214.953.6477  
Attorney Docket No. 062891.0362

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of the first inventor

Kenneth M. Buckland

Inventor's signature



Date

2/30/00

Residence (City, County, State)

Santa Rosa, Sonoma County, California

Citizenship

Canada

Post Office Address

2777 Yulupa Avenue, #177  
Santa Rosa, California 95405